




THE ATTACHMENT AT YOUR DIMENSIONS

application :

Those attachments are used for the lateral displacement of the load, without forcing the forklifttruck to be maneuvered and allows at the same time the loading and unloading in narrow surroundings and in heavy use.

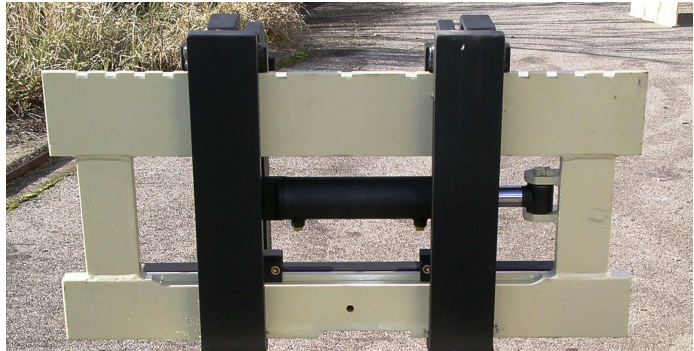

technical characteristics :


- standard range with ISO-mounting
- capacities from 3 to 8 metric tons (others on demand)
- sliding pads in bronze or nylon (or rollerguided) for smooth lateral movement


Models :

- ISO (integrated or hook-on)
- for hardest applications (with reinforced hooks)
- Pin-Type (mounting)
- Double-/ Triple-/ Quadruple-Sideshifter

Options :

- special cylinders
- special coatings to secure the load

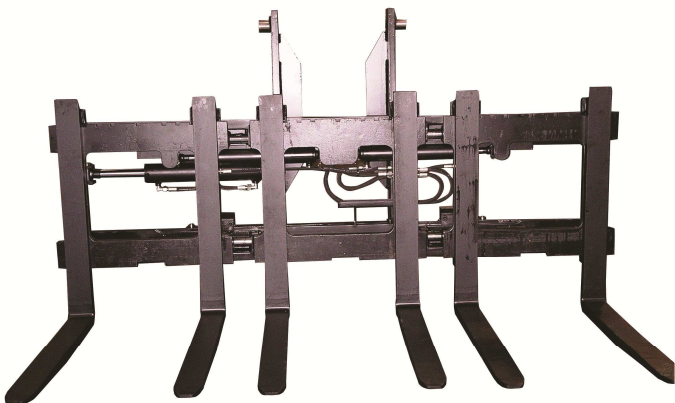


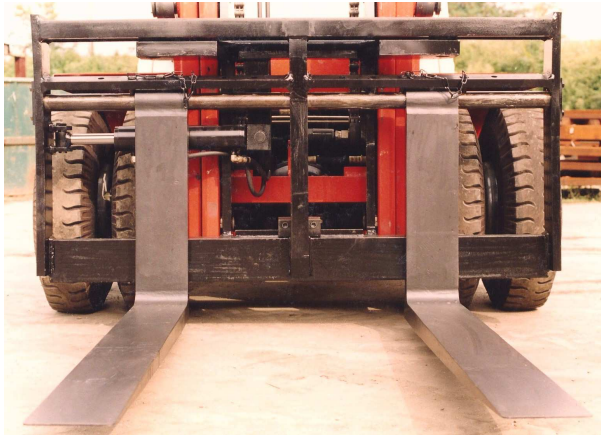


integrated sideshifter PIN-TYPE




Sideshifter/forkpositioner with adjustable frame width

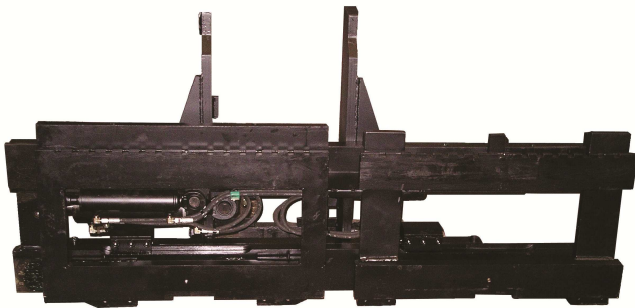


integrated double sideshifter
base carriage with sideshift
mounted sideshifter: 1 fix +. 1 mobile

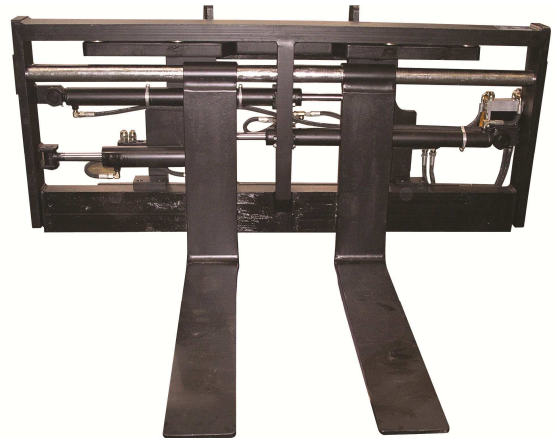

forkpositioner with separate sideshift

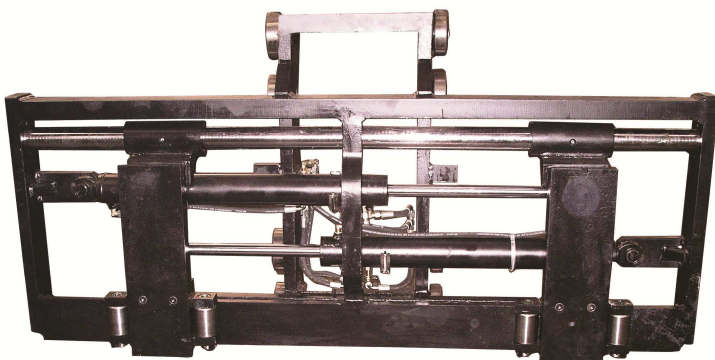

integrated forkpositioner with integrated sideshift and carriage plates for forks

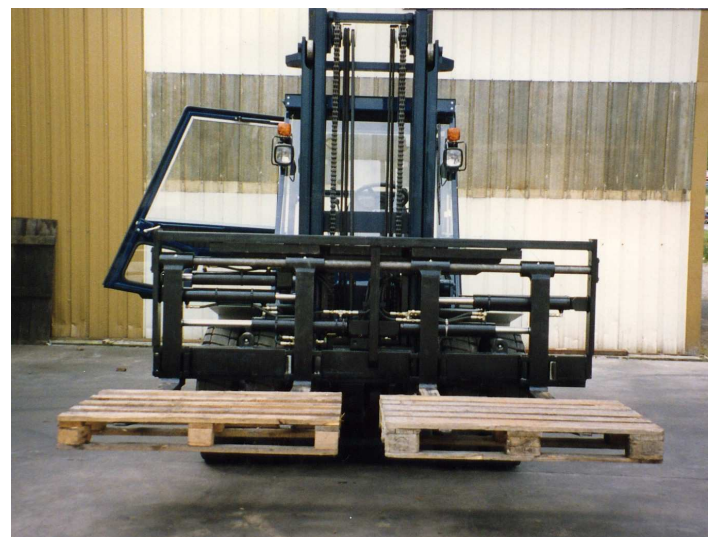

integrated triple-sideshifter with forkpositioning
freeview version